


FEATURES AND BENEFITS

Product Summary		
P_D	200mW	@25 °C
V_F	0.9V	@10mA
V_{RRM}	2.4 – 75V	@25 °C

- Constant Voltage control
- Wide Voltage Range Selection 2.4V to 75V
- RoHS Compliant / Green EMC UL Flammability Classification Rating 94V-0
- Matte Tin (Sn) Lead finish Solderable per MIL-STD-202, Method 208
- Moisture Sensitivity: Level 1 per J-STD-020
- Weight: 0.0016 grams (Approximate)

SOD-523



Cathode  Anode

Maximum Ratings (TA = 25 °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Power Dissipation	P_{TM}	150	mW
Forward Voltage	V_F	0.9	V
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55 to +150	°C







ELECTRICAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)


*1 Pulse width = 10 ms

Type Number	Device Marking	Vz (V) *1			IzT	ZzT@IzT	Zzk@Izk	Izk (mA)	I _R (uA)	V _R (V)
		Nom(V)	Min(V)	Max(V)	mA	Ω				
BZX584B2V4	Z1	2.4	2.35	2.45	5	100	600	1.0	50	1.0
BZX584B2V7	Z2	2.7	2.65	2.75	5	100	600	1.0	20	1.0
BZX584B3V0	Z3	3.0	2.94	3.06	5	95	600	1.0	10	1.0
BZX584B3V3	Z4	3.3	3.23	3.37	5	95	600	1.0	5	1.0
BZX584B3V6	Z5	3.6	3.53	3.67	5	90	600	1.0	5	1.0
BZX584B3V9	Z6	3.9	3.82	3.98	5	90	600	1.0	3	1.0
BZX584B4V3	Z7	4.3	4.21	4.39	5	90	600	1.0	3	1.0
BZX584B4V7	X1	4.7	4.61	4.79	5	80	500	1.0	3	2.0
BZX584B5V1	2Z2	5.1	5.00	5.20	5	60	480	1.0	2	2.0

Type Number	Device Marking	Vz (V) *1			IzT	ZzT@IzT	Zzk@Izk	Izk (mA)	IR (uA)	VR (V)
		Nom(V)	Min(V)	Max(V)						
BZX584B5V6	2Z3	5.6	5.49	5.71	5	40	400	1.0	1	2.0
BZX584B6V2	2Z4	6.2	6.08	6.32	5	10	150	1.0	3	4.0
BZX584B6V8	2Z5	6.8	6.66	6.94	5	15	80	1.0	2	4.0
BZX584B7V5	2Z6	7.5	7.35	7.65	5	15	80	1.0	1	5.0
BZX584B8V2	2Z7	8.2	8.04	8.36	5	15	80	1.0	0.7	5.0
BZX584B9V1	2Z8	9.1	8.92	9.28	5	15	100	1.0	0.5	6.0
BZX584B10	2Z9	10	9.80	10.20	5	20	150	1.0	0.2	7.0
BZX584B11	2Y1	11	10.78	11.22	5	20	150	1.0	0.1	8.0
BZX584B12	2Y2	12	11.76	12.24	5	25	150	1.0	0.1	8.0
BZX584B13	2Y3	13	12.74	13.26	5	30	170	1.0	0.1	8.0
BZX584B14	2Y8	14	13.72	14.28	5	30	110	1.0	0.1	10.5
BZX584B15	2Y4	15	14.70	15.30	5	30	200	1.0	0.1	10.5
BZX584B16	2Y5	16	15.68	16.32	5	40	200	1.0	0.1	11.2
BZX584B18	2Y6	18	17.64	18.36	5	45	225	1.0	0.1	12.6
BZX584B20	2Y7	20	19.60	20.40	5	55	225	1.0	0.1	14.0
BZX584B22	W8.	22	21.56	22.44	5	55	250	1.0	0.1	15.4
BZX584B24	W9.	24	23.52	24.48	5	70	250	1.0	0.1	16.8
BZX584B27	Y1.	27	26.46	27.54	2	80	300	0.5	0.1	18.9
BZX584B30	Y2.	30	29.40	30.60	2	80	300	0.5	0.1	21.0
BZX584B33	Y3.	33	32.34	33.66	2	80	325	0.5	0.1	23.1
BZX584B36	Y4.	36	35.28	36.72	2	90	350	0.5	0.1	25.2
BZX584B39	Y5.	39	38.22	39.78	2	130	350	0.5	0.1	27.3
BZX584B43	Y6.	43	42.14	43.86	2	130	350	0.5	0.1	29.4
BZX584B47	V1.	47	45.83	48.17	2	170	1000	0.25	0.1	36
BZX584B51	V2.	51	49.73	52.27	2	180	1300	0.25	0.1	39
BZX584B56	V3.	56	54.60	57.40	2	200	1400	0.25	0.1	43
BZX584B62	V4.	62	60.45	63.55	2	225	1400	0.25	0.1	47
BZX584B68	V5.	68	66.30	69.70	2	240	1600	0.25	0.1	52
BZX584B75	V6.	75	73.13	76.87	2	265	1700	0.25	0.1	56

RATING AND CHARACTERISTICS CURVES

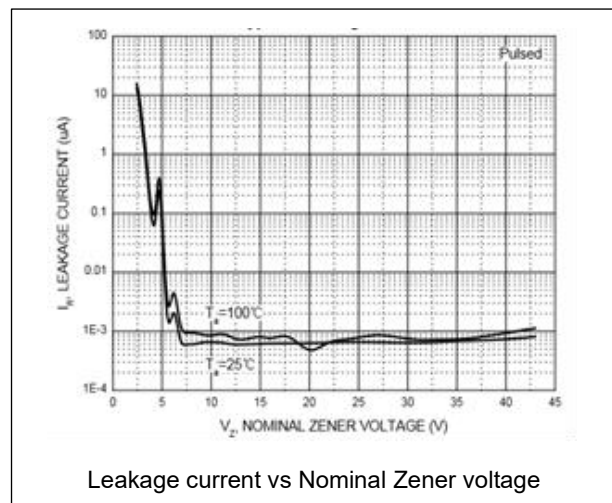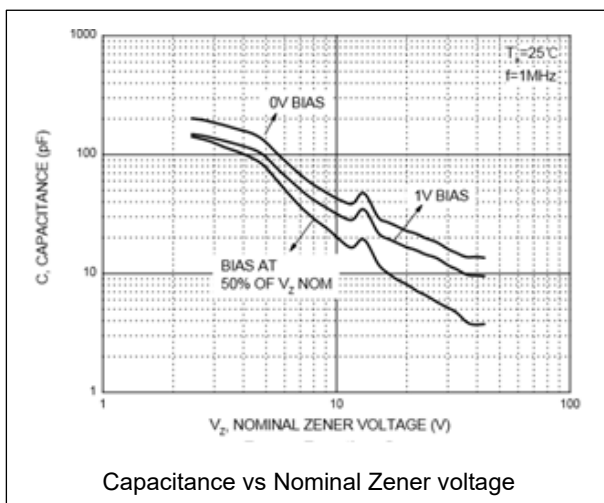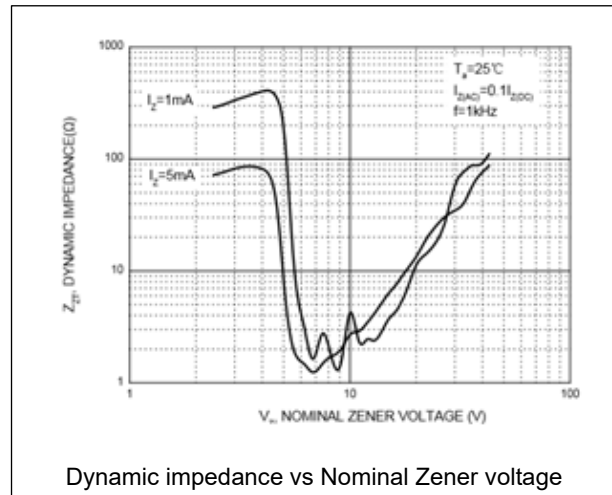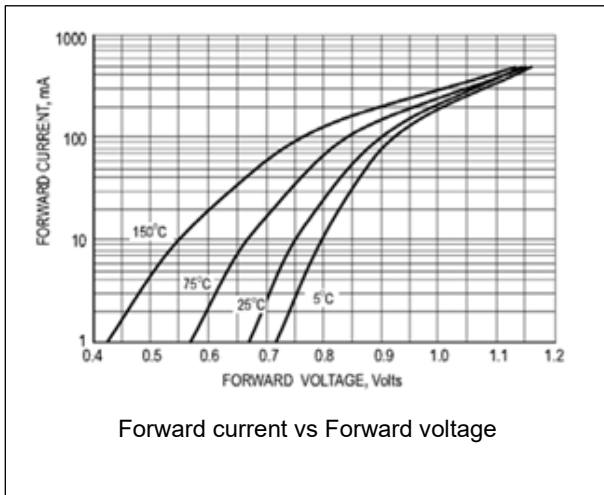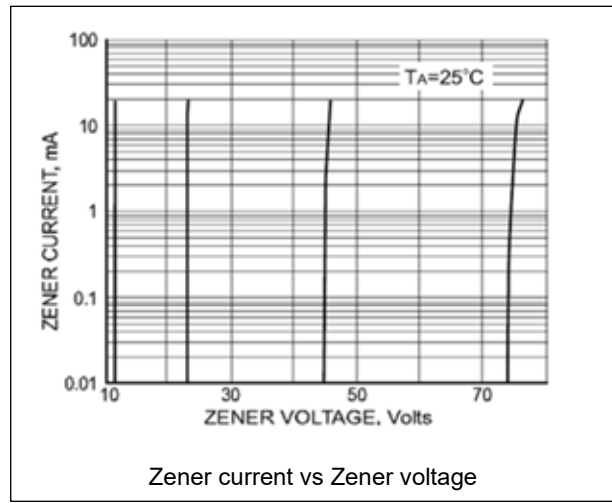
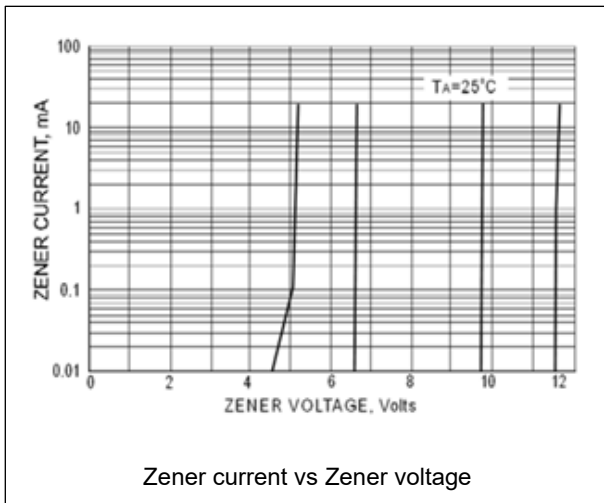


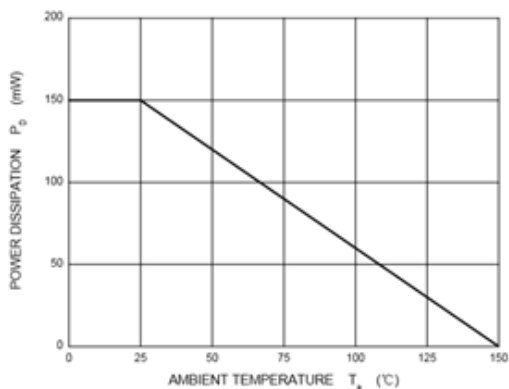

Power derating curve


PACKAGE OUTLINE DIMENSIONS

SOD-523

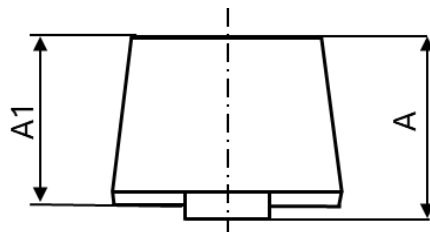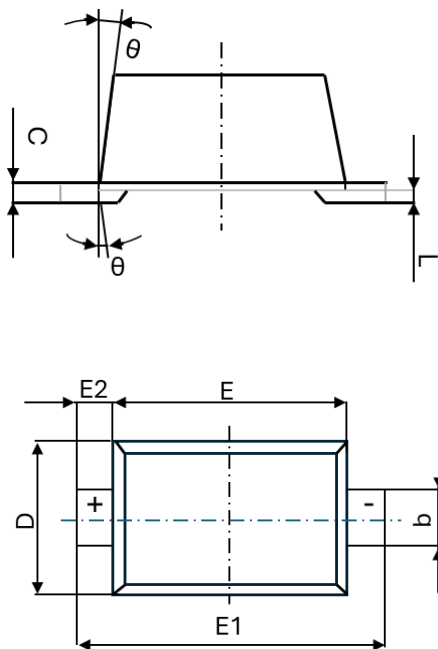

Symbol	MIN	MAX
A	0.51	0.77
A1	0.50	0.70
b	0.25	0.35
c	0.08	0.15
D	0.75	0.85
E	1.10	1.30
E1	1.50	1.70
E2	0.20REF.	
L	0.01	0.07
θ	7°REF.	
Unit: mm		


SUGGESTED PAD LAYOUT

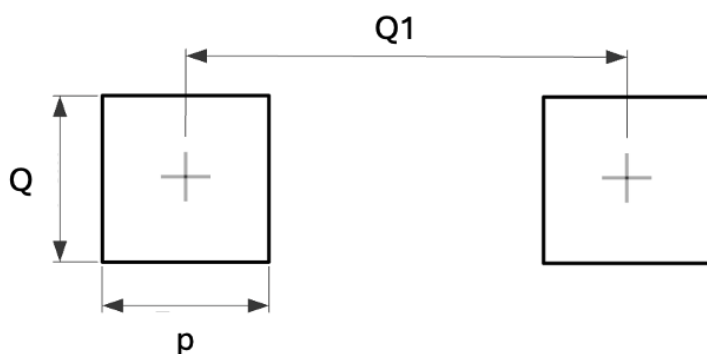

Symbol	Type
Q1	1.42
Q	0.7
p	0.6
Unit: mm	

DEVICE MARKING CODE AND ORDERING INFORMATION

DEVICE	Marking	Quantity	Packing
BZX584B series	Refer to Device Marking	8000/7"Reel	Tape & Reel

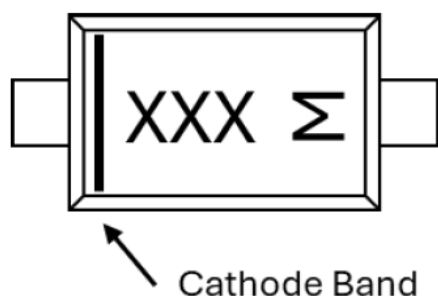

XXX: Product Marking Code

Σ : Date Code (Rotate 90° counterclockwise)

Odd Year	Even Year
1	E
2	F
3	H
4	J
5	K
6	L
7	N
8	P
9	U
T	X
V	Y
C	Z

NOTICE:

AZUREMOTO'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS COMPONENTS IN ANY LIFE SUPPORT DEVICES OR SYSTEMS.

AZUREMOTO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY OR RUGGEDNESS.