


FEATURES AND BENEFITS

Product Summary		
P_D	150mW	@25 °C
I_{ZT}	2 / 5mA	@25 °C
V_{RRM}	2.4 – 75V	@25 °C

- Constant Voltage control
- Wide Voltage Range Selection 2.4V to 75V
- RoHS Compliant / Green EMC UL Flammability Classification Rating 94V-0
- Matte Tin (Sn) Lead finish Solderable per MIL-STD-202, Method 208
- Moisture Sensitivity: Level 1 per J-STD-020
- Weight: 0.0005 grams (Approximate)

SOD-923



Cathode  Anode

Maximum Ratings (TA = 25 °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Power Dissipation	P_{TM}	150	mW
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55 to +150	°C







ELECTRICAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)


*1 Pulse width = 10 ms

Type Number	Device Marking	Vz (V) *1			I _{ZT}	Z _{ZT} @I _{ZT}	Z _{ZK} @I _{ZK}	I _{zk} (mA)	I _R (uA)	V _R (V)
		Nom(V)	Min(V)	Max(V)	mA	Ω				
BZX984B2V4	Z1	2.4	2.35	2.45	5	100	600	1.0	50	1.0
BZX984B2V7	Z2	2.7	2.65	2.75	5	100	600	1.0	20	1.0
BZX984B3V0	Z3	3.0	2.94	3.06	5	95	600	1.0	10	1.0
BZX984B3V3	Z4	3.3	3.23	3.37	5	95	600	1.0	5	1.0
BZX984B3V6	Z5	3.6	3.53	3.67	5	90	600	1.0	5	1.0
BZX984B3V9	Z6	3.9	3.82	3.98	5	90	600	1.0	3	1.0
BZX984B4V3	Z7	4.3	4.21	4.39	5	90	600	1.0	3	1.0
BZX984B4V7	X1	4.7	4.61	4.79	5	80	500	1.0	3	2.0
BZX984B5V1	X2	5.1	5.00	5.20	5	60	480	1.0	2	2.0
BZX984B5V6	X3	5.6	5.49	5.71	5	40	400	1.0	1	2.0

Type Number	Device Marking	Vz (V) *1			IzT	ZzT@IzT	Zzk@Izk	Izk (mA)	I _R (uA)	V _R (V)
		Nom(V)	Min(V)	Max(V)						
BZX984B6V2	X4	6.2	6.08	6.32	5	10	150	1.0	3	4.0
BZX984B6V8	X5	6.8	6.66	6.94	5	15	80	1.0	2	4.0
BZX984B7V5	X6	7.5	7.35	7.65	5	15	80	1.0	1	5.0
BZX984B8V2	X7	8.2	8.04	8.36	5	15	80	1.0	0.7	5.0
BZX984B9V1	X8	9.1	8.92	9.28	5	15	100	1.0	0.5	6.0
BZX984B10	X9	10	9.80	10.20	5	20	150	1.0	0.2	7.0
BZX984B11	W1	11	10.78	11.22	5	20	150	1.0	0.1	8.0
BZX984B12	W2	12	11.76	12.24	5	25	150	1.0	0.1	8.0
BZX984B13	W3	13	12.74	13.26	5	30	170	1.0	0.1	8.0
BZX984B15	W4	15	14.70	15.30	5	30	200	1.0	0.1	10.5
BZX984B16	W5	16	15.68	16.32	5	40	200	1.0	0.1	11.2
BZX984B18	W6	18	17.64	18.36	5	45	225	1.0	0.1	12.6
BZX984B20	W7	20	19.60	20.40	5	55	225	1.0	0.1	14.0
BZX984B22	W8	22	21.56	22.44	5	55	250	1.0	0.1	15.4
BZX984B24	W9	24	23.52	24.48	5	70	250	1.0	0.1	16.8
BZX984B27	Y1	27	26.46	27.54	2	80	300	0.5	0.1	18.9
BZX984B30	Y2	30	29.40	30.60	2	80	300	0.5	0.1	21.0
BZX984B33	Y3	33	32.34	33.66	2	80	325	0.5	0.1	23.1
BZX984B36	Y4	36	35.28	36.72	2	90	350	0.5	0.1	25.2
BZX984B39	Y5	39	38.22	39.78	2	130	350	0.5	0.1	27.3
BZX984B43	Y6	43	42.14	43.86	2	130	350	0.5	0.1	29.4
BZX984B47	V1	47	45.83	48.17	2	170	1000	0.25	0.1	36
BZX984B51	V2	51	49.73	52.27	2	180	1300	0.25	0.1	39
BZX984B56	V3	56	54.60	57.40	2	200	1400	0.25	0.1	43
BZX984B62	V4	62	60.45	63.55	2	225	1400	0.25	0.1	47
BZX984B68	V5	68	66.30	69.70	2	240	1600	0.25	0.1	52
BZX984B75	V6	75	73.13	76.87	2	265	1700	0.25	0.1	56


RATING AND CHARACTERISTICS CURVES

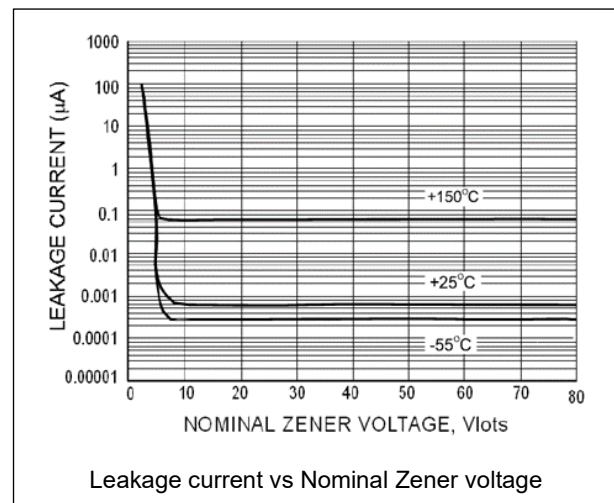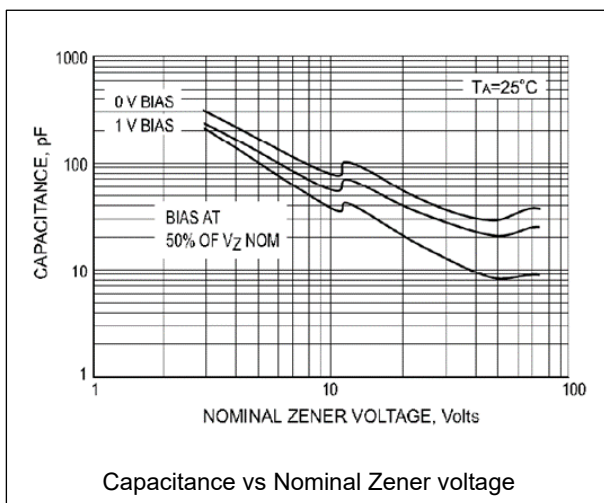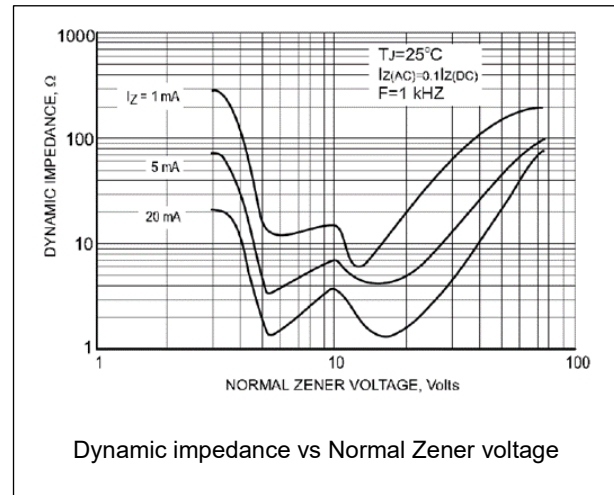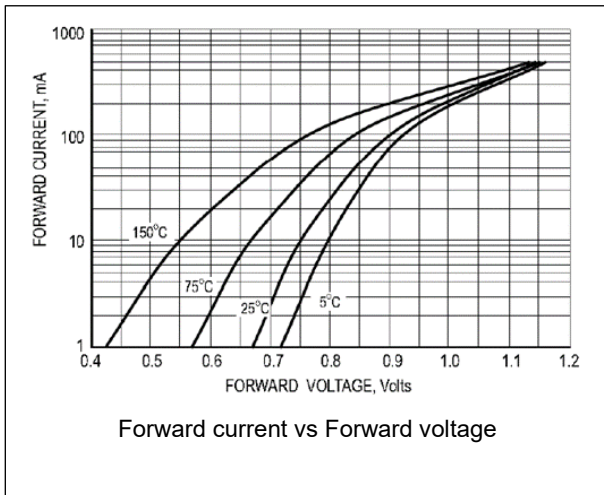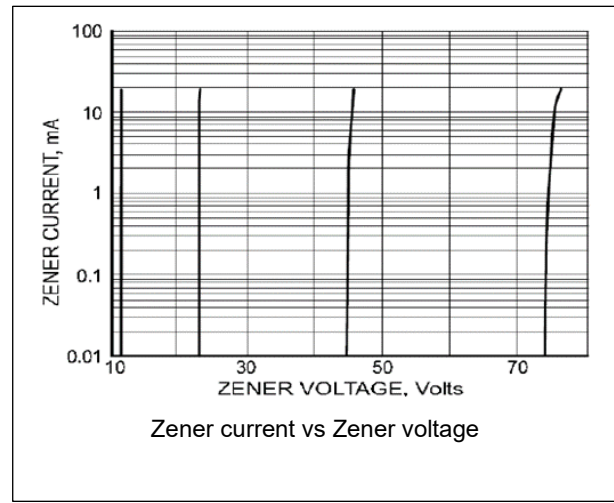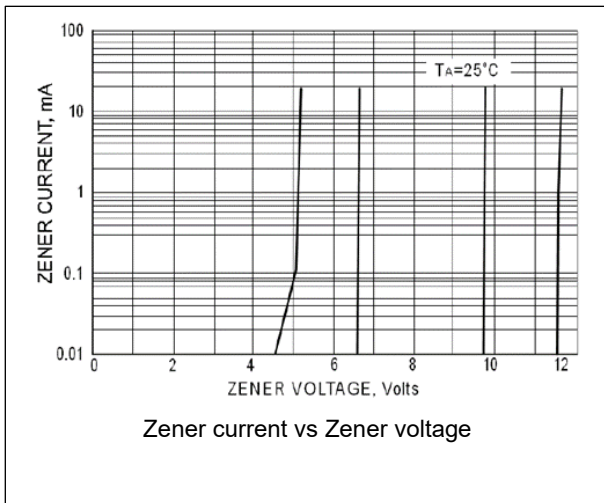

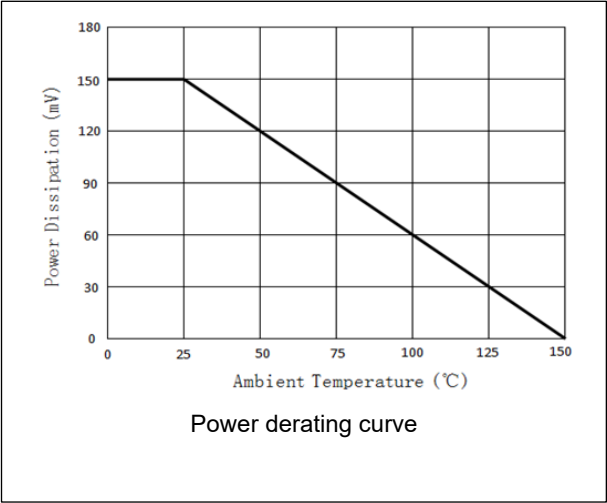


PACKAGE OUTLINE DIMENSIONS

SOD-923

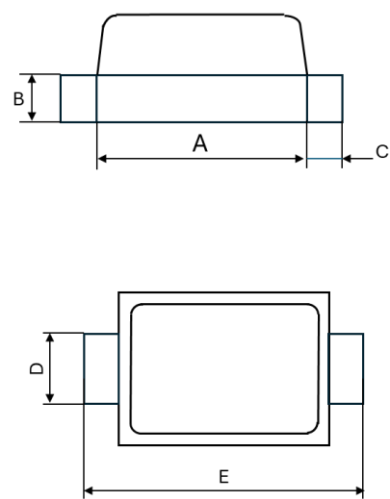

Symbol	MIN	MAX
A	0.70	0.90
B	0.06	0.20
C	0.05	0.15
D	0.15	0.30
E	0.90	1.10
F	0.39	0.45
G	0.55	0.65
Unit: mm		


SUGGESTED PAD LAYOUT

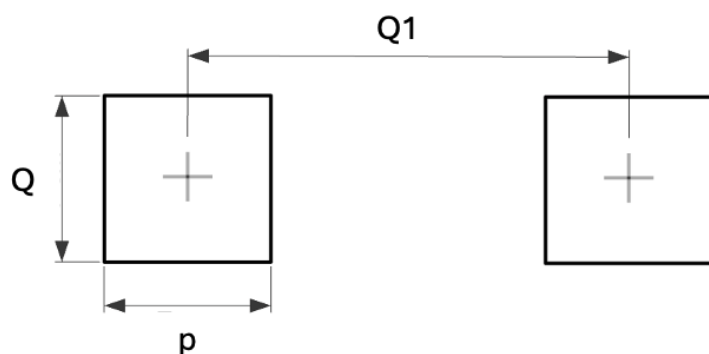

Symbol	Typ
Q1	1.40
Q	0.45
p	0.45
Unit: mm	

DEVICE MARKING CODE AND ORDERING INFORMATION

DEVICE	Marking	Quantity	Packing
BZX984B series	Refer to Device Marking	8000/7"Reel	Tape & Reel

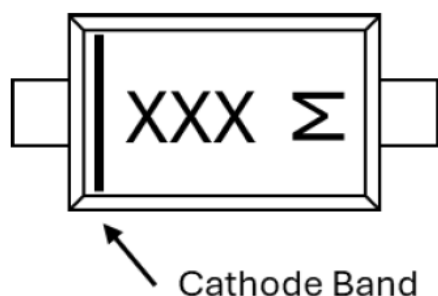

XXX: Product Marking Code

Σ : Date Code (Rotate 90° counterclockwise)

Odd Year	Even Year
1	E
2	F
3	H
4	J
5	K
6	L
7	N
8	P
9	U
T	X
V	Y
C	Z

NOTICE:

AZUREMOTO'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS COMPONENTS IN ANY LIFE SUPPORT DEVICES OR SYSTEMS.

AZUREMOTO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY OR RUGGEDNESS.