


FEATURES AND BENEFITS

Product Summary		
I_O	30mA	@25 °C
V_F	0.37V	@1mA
V_{RRM}	40V	@25 °C

- Low Forward Voltage Schottky Rectifier
- High reliability
- RoHS Compliant / Green EMC UL Flammability Classification Rating 94V-0
- Matte Tin (Sn) Lead finish Solderable per MIL-STD-202, Method 208
- Moisture Sensitivity: Level 1 per J-STD-020
- Weight: 0.01 grams (Approximate)

SOD-323



Cathode  Anode

Maximum Ratings (TA = 25 °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Repetitive Peak Reverse Voltage	V_{RRM}	40	V
Working Reverse Voltage	V_{RWM}	40	V
DC Reverse Voltage	V_R	30	V
Average Rectified Output Current	I_O	30	mA
Non-Repetitive Peak Forward Surge Current (@t=8.3ms)	I_{FSM}	200	mA
Power Dissipation	P_{TM}	297	mW
Junction Temperature	T_J	125	°C
Storage Temperature	T_{STG}	-55 to +125	°C




THERMAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Thermal Resistance from Junction to Ambient*	$R_{\theta JA}$	421	°C/W

* Device mounted on 30mmx25mmx1.6mm FR4 PCB, Copper foil thickness 35um.

ELECTRICAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)


PARAMETER	SYMBOL	CONDITION	MIN	TYP.	MAX	UNIT
Forward Voltage	V_F	$I_F = 1\text{mA}$			0.37	V
Reverse Current	I_R	$V_R = 30\text{V}$			0.50	μA
Capacitance	C_T	$V_R = 1.0\text{V}, f = 1\text{MHz}$		2		pF

RATING AND CHARACTERISTICS CURVES

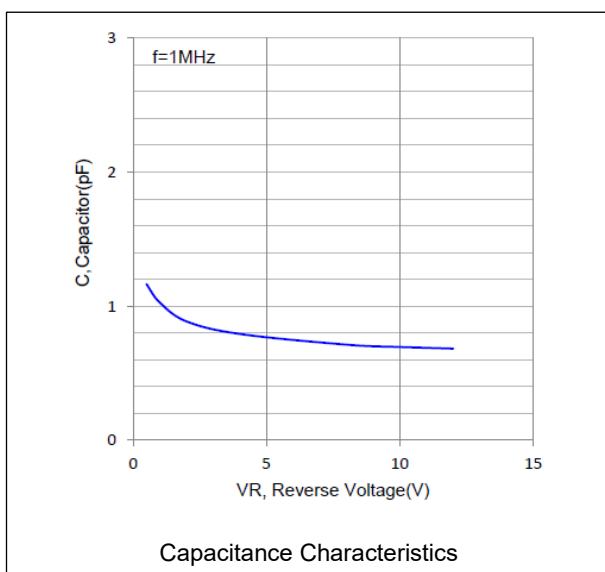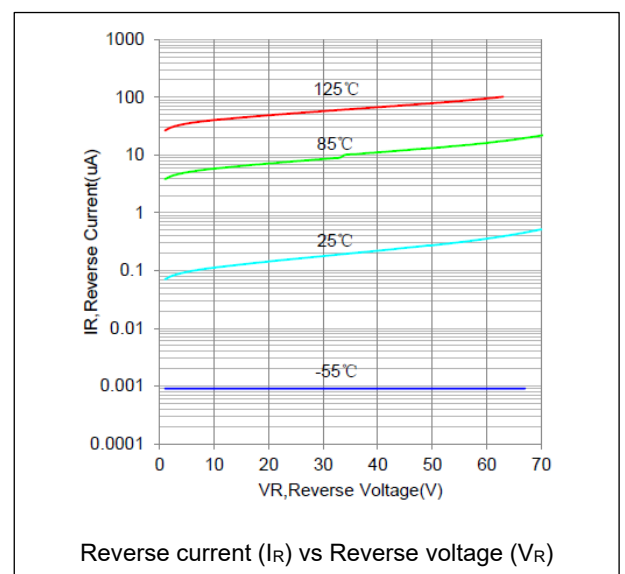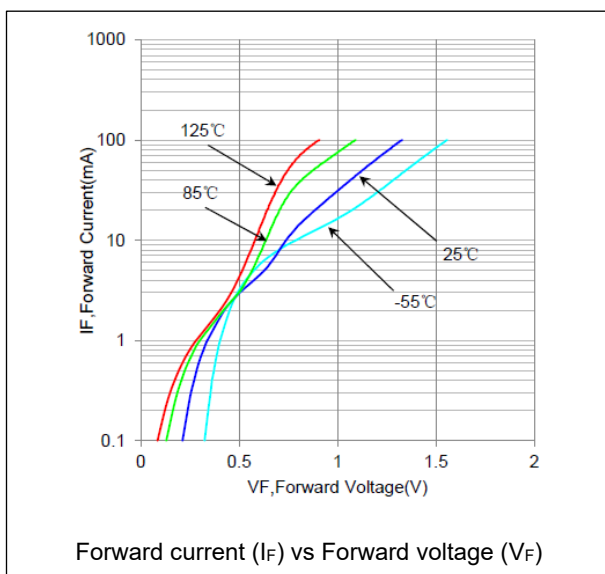


PACKAGE OUTLINE DIMENSIONS

SOD-323

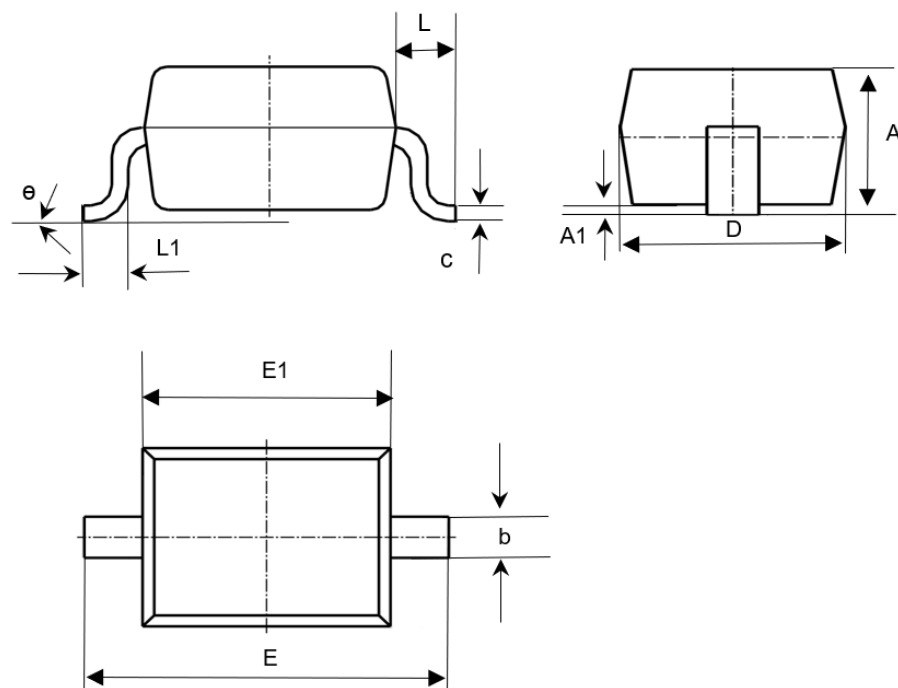

Symbol	MIN	MAX
A	0.80	1.00
A1	0.00	0.10
b	0.25	0.40
c	0.08	0.18
D	1.15	1.40
E	2.30	2.70
E1	1.60	1.80
L	0.475REF	
L1	0.25	0.4
θ	0°	8°
Unit: mm		


SUGGESTED PAD LAYOUT

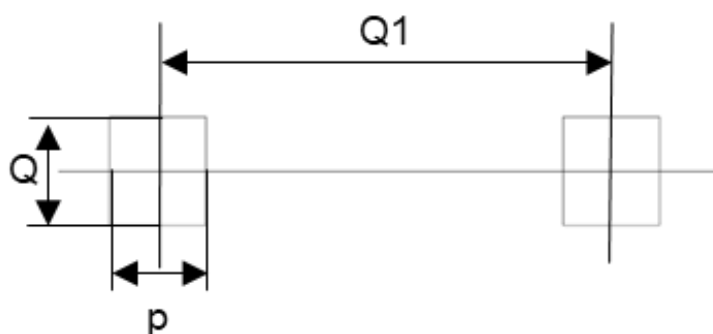

Symbol	Type
Q1	2.15
Q	0.8
p	0.7
Unit: mm	

DEVICE MARKING CODE AND ORDERING INFORMATION

DEVICE	Marking	Quantity	Packing
RB751V-40	5E	3000/7"Reel	Tape & Reel

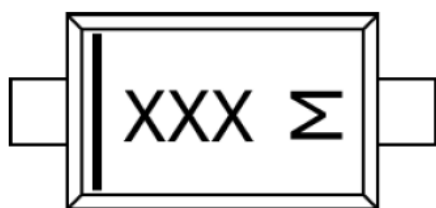

Cathode Band

XXX: Product Marking Code

Σ : Date Code (Rotate 90° counterclockwise)

Odd Year	Even Year
1	E
2	F
3	H
4	J
5	K
6	L
7	N
8	P
9	U
T	X
V	Y
C	Z

NOTICE:

AZUREMOTO'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS COMPONENTS IN ANY LIFE SUPPORT DEVICES OR SYSTEMS. AZUREMOTO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY OR RUGGEDNESS.