

FEATURES AND BENEFITS

Product Summary		
I_O	150mA	@25 °C
V_F	715mV	@1mA
V_{RRM}	100V	@25 °C

SOD-923







- For General Purpose Switching Applications
- High Conductance
- RoHS Compliant / Green EMC UL Flammability Classification Rating 94V-0
- Matte Tin (Sn) Lead finish Solderable per MIL-STD-202, Method 208
- Moisture Sensitivity: Level 1 per J-STD-020

Maximum Ratings (TA = 25 °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Repetitive Peak Reverse Voltage	V_{RRM}	100	V
Working Reverse Voltage	V_{RWM}	85	V
Repetitive Peak Forward Current	I_{FRM}	300	mA
Non-Repetitive Peak Forward Surge Current (@t=10ms)	I_{FSM}	500	mA
Continuous Forward Current	I_O	150	mA
Power Dissipation	P_D	200	mW
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55 to +150	°C

ELECTRICAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)					
PARAMETER	SYMBOL	CONDITION	MIN	MAX	UNIT
Breakdown Voltage	V_{BR}	$I_R = 100\mu A$	100		V
Forward Voltage	V_F	$I_F = 1mA$		715	mV
		$I_F = 10mA$		855	mV
		$I_F = 50mA$		1.00	V
		$I_F = 150mA$		1.25	V
Reverse Current	I_R	$V_R = 75V$		1	μA
		$V_R = 75V T_a = 150\text{ °C}$		50	μA




Capacitance	C_T	$V_R = 0V, f = 1MHz$	2	pF
Reverse Recovery Time	t_{rr}	$I_F = I_R = 10mA$ $I_{RR} = 1mA, R_L = 100\Omega$	6	ns

RATING AND CHARACTERISTICS CURVES

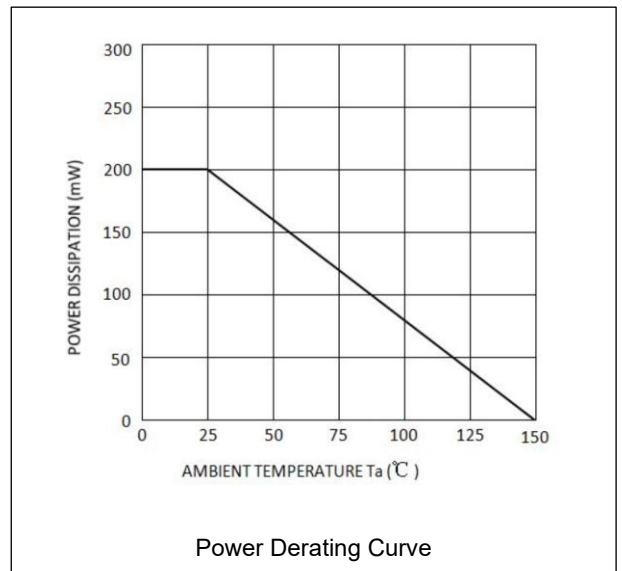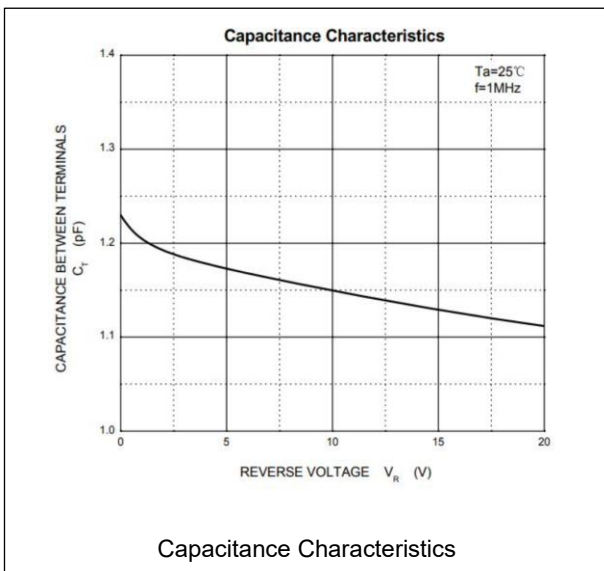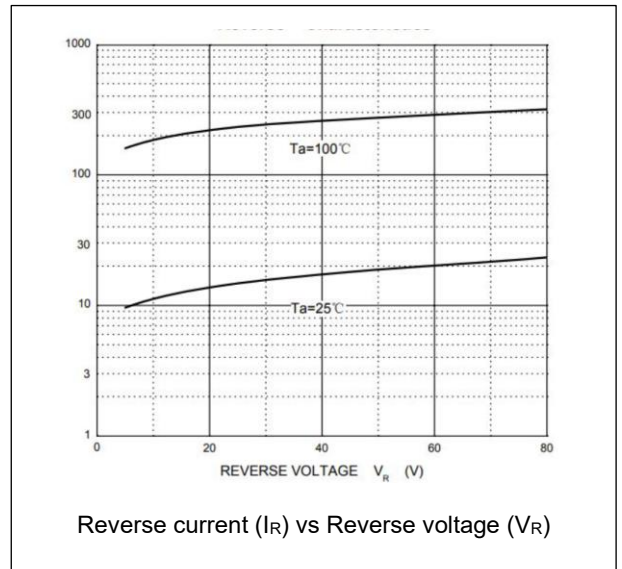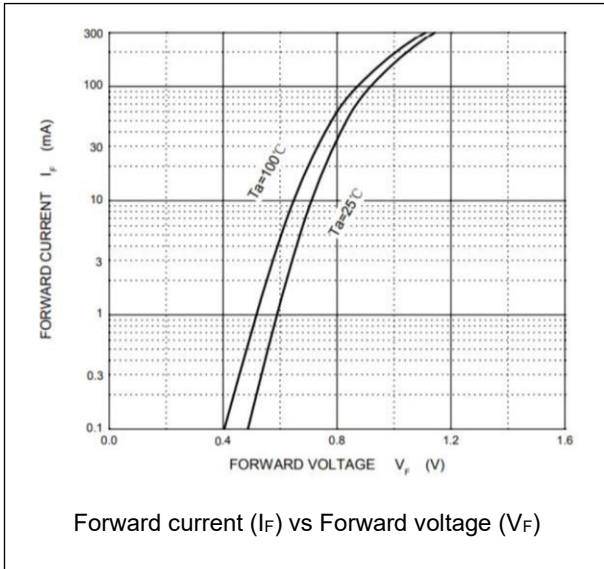


PACKAGE OUTLINE DIMENSIONS

SOD-923

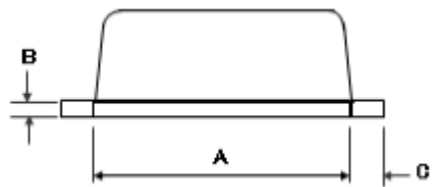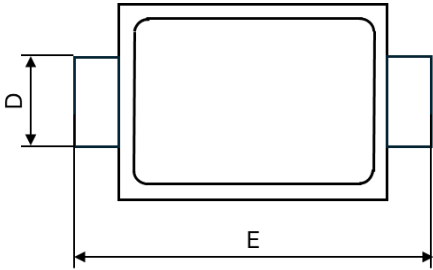

Symbol	MIN	MAX
A	0.70	0.90
B	0.05	0.20
C	0.05	0.15
D	0.15	0.30
E	0.90	1.10
F	0.39	0.45
G	0.55	0.65
Unit: mm		


SUGGESTED PAD LAYOUT

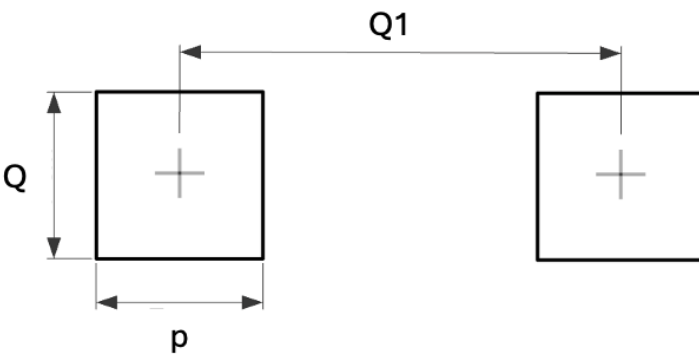

Symbol	Typ
Q1	1.40
Q	0.45
p	0.45
Unit: mm	

DEVICE MARKING CODE AND ORDERING INFORMATION

DEVICE	Marking	Quantity	Packing
BAS16M9	S	8000/7"Reel	Tape & Reel

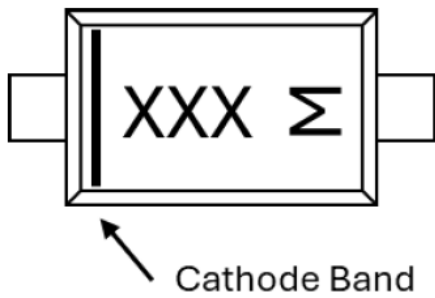

XXX: Product Marking Code

Σ : Date Code (Rotate 90° counterclockwise)

Odd Year	Even Year
1	E
2	F
3	H
4	J
5	K
6	L
7	N
8	P
9	U
T	X
V	Y
C	Z

NOTICE:

AZUREMOTO'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS COMPONENTS IN ANY LIFE SUPPORT DEVICES OR SYSTEMS. AZUREMOTO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY OR RUGGEDNESS.